

AroJac

The Hamskea AroJac arrow puller is a mechanical aid used to extract embedded arrows.

Only senior club members may use the AroJac; junior archers are not permitted.


Incorrect use of the AroJac may result in arrow damage or personal injury therefore anyone who wishes to use the puller must receive club instruction (approx. 5 mins).

As using the AroJac is potentially damaging to the arrow, the owner of the arrow should be the one operating it. If the archer nominates someone else, there is no recourse for any damage to the arrow.

The AroJac is setup for right handed operation.



AroJac Procedure

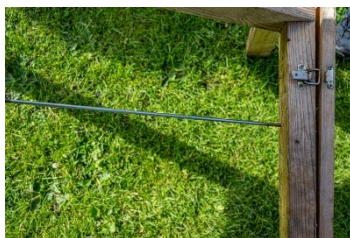

Make all reasonable effort to remove the arrow from the timber frame using a handheld arrow puller. If it is not possible to safely remove the arrow by hand, then use the AroJac to extract the arrow.

1. Open the jaws of the AroJac.
2. Position the puller around the arrow with the rubber jaws either side of the arrow shaft.
3. Slide the puller along the arrow until the plunger touches the timber.
4. With one hand, grip the puller around the arrow gently but firmly squeezing the jaws together.
5. With the other hand, rotate the lever backwards.
6. The jaws of the puller will constrict around the arrow gripping the shaft.
7. As you continue to rotate the lever, the AroJac will push away from the timber frame pulling the arrow with it.
8. After extracting the arrow from the timber closely inspect the arrow for damage. If there is any damage, do not shoot that arrow.



AroJac Maintenance

The puller must be kept clean and free from arrow lube. Clean only with soapy water and dry thoroughly.